


Socket Head Capscrews

DIN 912 / ISO 4762

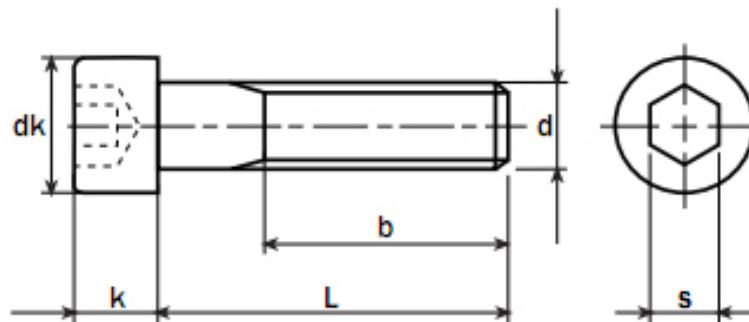

d	M1.6	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30	M36	M42
dk	3	3.8	4.5	5.5	7	8.5	10	13	16	18	21	24	27	30	33	36	40	45	54	63
k - Max.	1.6	2	2.5	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30	36	42
b	15.2	16	17	18	20	22	24	28	32	36	40	44	48	52	56	60	66	72	84	96
s	1.5	1.5	2	2.5	3	4	5	6	8	10	12	14	14	17	17	19	19	22	27	32
Pitch	0.35	0.4	0.45	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3	3.5	4	4.5
L	LENGTH OF SCREW																			

With internal hexagon socket to fit a hex wrench or power driver for industrial assembly line production.

Tel: 01234 346242
www.challenge-europe.co.uk
sales@challenge-europe.co.uk