

Pan Head Self-Tappers

Type 'AB' Pointed Pozi DIN 7981 C Z



| d | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|----------|------|------|------|------|------|------|------|------|
| dk | 4.2 | 5.6 | 6.9 | 7.5 | 8.2 | 9.5 | 10.8 | 12.5 |
| k | 1.8 | 2.2 | 2.6 | 2.8 | 3.05 | 3.55 | 3.95 | 4.55 |
| t - min | 1.1 | 1.58 | 1.47 | 1.7 | 1.88 | 2.3 | 2.5 | 3.0 |
| t - max | 1.35 | 1.83 | 1.93 | 2.16 | 2.34 | 2.74 | 2.97 | 3.48 |
| Pozi No. | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |


Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Pan Head Self-Tappers

Type 'B' Blunt Pozi DIN 7981 F Z

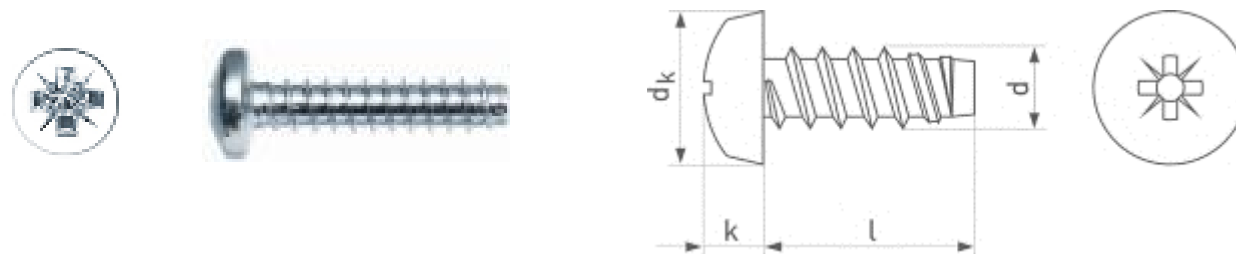

| d | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 |
|----------|------|------|------|------|------|------|------|
| dk | 4.2 | 5.6 | 6.9 | 7.5 | 8.2 | 9.5 | 10.8 |
| k | 1.8 | 2.2 | 2.6 | 2.8 | 3.05 | 3.55 | 3.95 |
| t - min | 1.1 | 1.58 | 1.47 | 1.7 | 1.88 | 2.3 | 2.5 |
| t - max | 1.35 | 1.83 | 1.93 | 2.16 | 2.34 | 2.74 | 2.97 |
| Pozi No. | 1 | 1 | 2 | 2 | 2 | 2 | 3 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Pan Head Self-Tappers

Type 'AB' Pointed Phillips DIN 7981 C H



| d | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|--------------|------|------|------|------|------|------|------|------|
| dk | 4.2 | 5.6 | 6.9 | 7.5 | 8.2 | 9.5 | 10.8 | 12.5 |
| k | 1.8 | 2.2 | 2.6 | 2.8 | 3.05 | 3.55 | 3.95 | 4.55 |
| t - min | 0.86 | 1.35 | 1.4 | 1.63 | 1.8 | 2.3 | 2.5 | 3.0 |
| t - max | 1.32 | 1.8 | 2.03 | 2.26 | 2.46 | 2.87 | 3.15 | 3.66 |
| Phillips No. | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |


Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Pan Head Self-Tappers

Type 'B' Blunt Phillips DIN 7981 F H

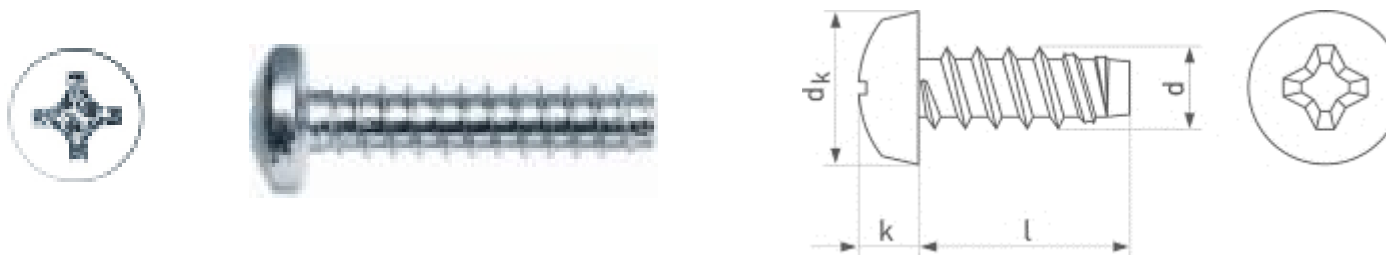

| d | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 |
|--------------|------|------|------|------|------|------|------|
| dk | 4.2 | 5.6 | 6.9 | 7.5 | 8.2 | 9.5 | 10.8 |
| k | 1.8 | 2.2 | 2.6 | 2.8 | 3.05 | 3.55 | 3.95 |
| t - min | 0.86 | 1.35 | 1.4 | 1.63 | 1.8 | 2.3 | 2.5 |
| t - max | 1.32 | 1.8 | 2.03 | 2.26 | 2.46 | 2.87 | 3.15 |
| Phillips No. | 1 | 1 | 2 | 2 | 2 | 2 | 3 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Pan Head Self-Tappers

Type ‘AB’ Pointed Torx DIN 7981 C T




| d | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|----------|-----|-----|------|------|------|------|------|
| dk | 5.6 | 6.9 | 7.5 | 8.2 | 9.5 | 10.8 | 12.5 |
| k | 2.2 | 2.6 | 2.8 | 3.05 | 3.55 | 3.95 | 4.55 |
| t - min | 0.8 | 1.1 | 1.3 | 1.4 | 1.6 | 1.8 | 2.3 |
| t - max | 1.2 | 1.4 | 1.60 | 1.6 | 2 | 2.3 | 2.7 |
| Torx No. | 10 | 15 | 20 | 20 | 25 | 25 | 30 |

Self-Tappers are mainly used in sheet steel products. These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Pan Head Self-Tappers

Type 'AB' Pointed Slotted DIN 7971 C

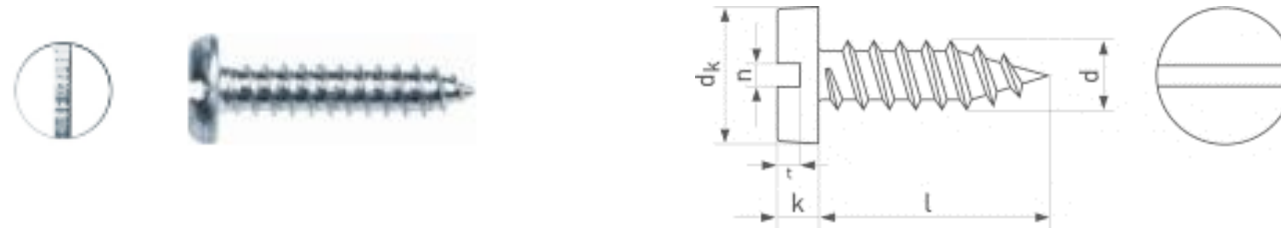

| d | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|---------|------|------|------|------|------|-----|------|------|
| dk | 4.2 | 5.6 | 6.9 | 7.5 | 8.2 | 9.5 | 10.8 | 12.5 |
| k | 1.35 | 1.7 | 3.1 | 2.3 | 2.45 | 2.8 | 3.2 | 3.65 |
| t - min | 0.55 | 0.79 | 0.95 | 1.05 | 1.15 | 1.4 | 1.6 | 1.8 |
| t - max | 0.8 | 1 | 1.25 | 1.40 | 1.5 | 1.7 | 1.95 | 2.2 |
| n | 0.6 | 0.8 | 1 | 1 | 1.2 | 1.2 | 1.6 | 1.6 |


Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Pan Head Self-Tappers

Type 'B' Blunt Slotted DIN 7971 F

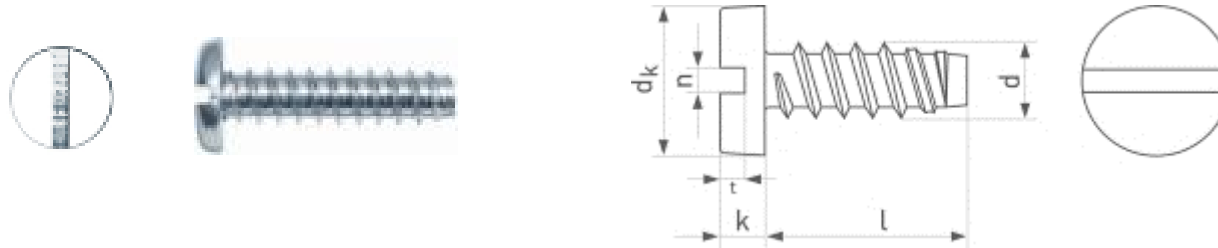

| d | 2.2 | 2.9 | 3.5 | 4.2 | 4.8 |
|----------------|------------|------------|------------|------------|------------|
| dk | 4.2 | 5.6 | 6.9 | 8.2 | 9.5 |
| k | 1.35 | 1.7 | 3.1 | 2.45 | 2.8 |
| t - min | 0.55 | 0.79 | 0.95 | 1.15 | 1.35 |
| t - max | 0.8 | 1 | 1.25 | 1.5 | 1.7 |
| n | 0.6 | 0.8 | 1 | 1.2 | 1.2 |


Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Countersunk Head Self-Tappers

Type 'AB' Pointed Pozi DIN 7982 C Z

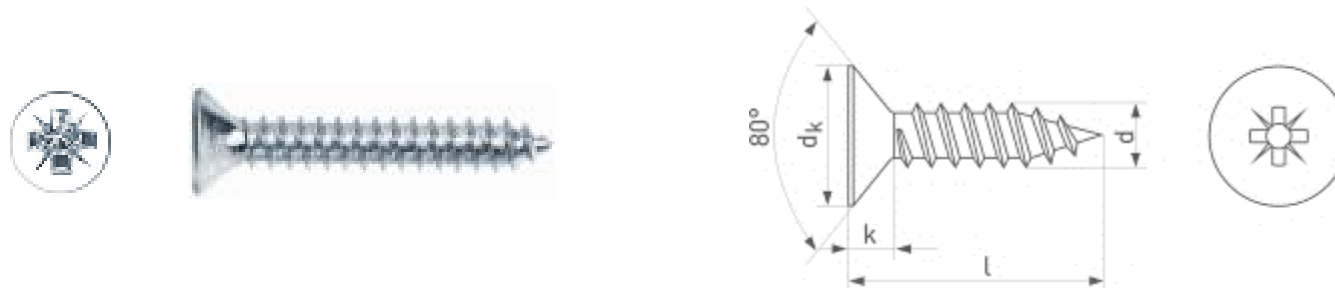


| d | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|----------|------|------|------|------|------|------|------|------|
| dk | 4.3 | 5.5 | 6.8 | 7.5 | 8.1 | 9.5 | 10.8 | 12.4 |
| k | 1.3 | 1.7 | 2.1 | 2.3 | 2.5 | 3.0 | 3.4 | 3.8 |
| t - min | 1.1 | 1.48 | 1.6 | 1.85 | 2.05 | 2.64 | 2.72 | 3.4 |
| t - max | 1.35 | 1.73 | 2.06 | 2.31 | 2.51 | 3.10 | 3.18 | 3.84 |
| Pozi No. | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Countersunk Head Self-Tappers Type 'B' Blunt Pozi DIN 7982 F Z

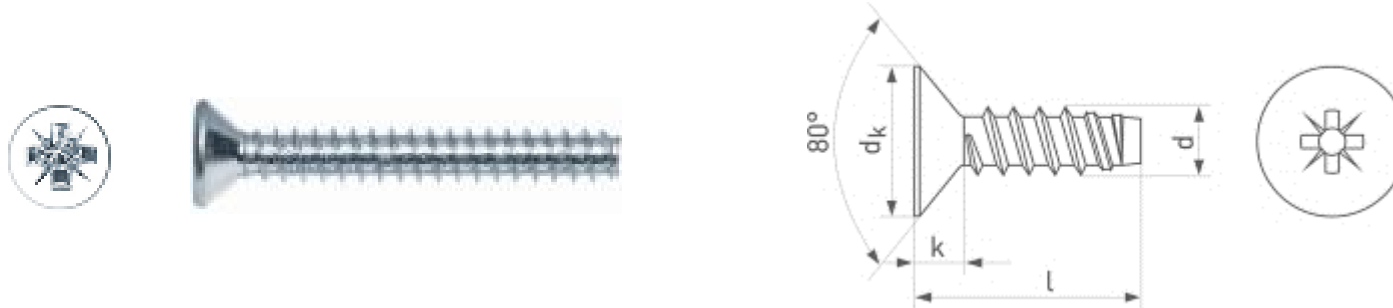

| d | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|----------|------|------|------|------|------|------|------|------|
| dk | 4.3 | 5.5 | 6.8 | 7.5 | 8.1 | 9.5 | 10.8 | 12.4 |
| k | 1.3 | 1.7 | 2.1 | 2.3 | 2.5 | 3.0 | 3.4 | 3.8 |
| t - min | 1.1 | 1.48 | 1.6 | 1.85 | 2.05 | 2.64 | 2.72 | 3.4 |
| t - max | 1.35 | 1.73 | 2.06 | 2.31 | 2.51 | 3.10 | 3.18 | 3.84 |
| Pozi No. | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |


Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Countersunk Head Self-Tappers

Type 'AB' Pointed Phillips DIN 7982 C H

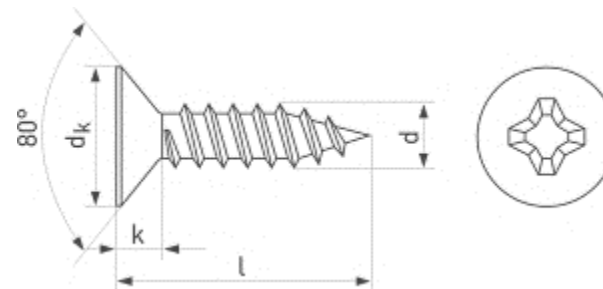


| d | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|--------------|------|-----|------|------|------|------|------|------|
| dk - max | 4.3 | 5.5 | 6.8 | 7.5 | 8.1 | 9.5 | 10.8 | 12.4 |
| k - max | 1.3 | 1.7 | 2.1 | 2.3 | 2.5 | 3.0 | 3.4 | 3.8 |
| t - min | 1.02 | 1.4 | 1.62 | 2.03 | 2.11 | 2.59 | 2.95 | 3.3 |
| t - max | 1.32 | 1.7 | 2.12 | 2.53 | 2.62 | 3.10 | 3.53 | 3.91 |
| Phillips No. | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Countersunk Head Self-Tappers Type 'AB' Pointed Torx DIN 7982 C T

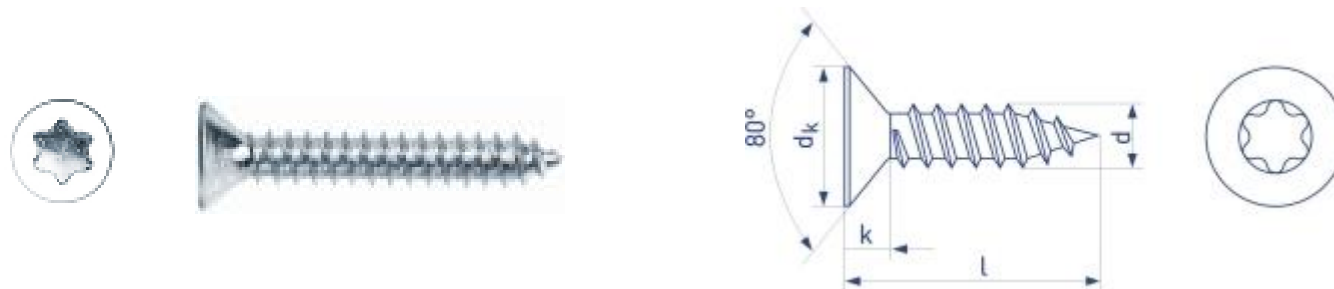

| d | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|----------|-----|-----|-----|-----|------|------|------|
| dk | 5.5 | 6.8 | 7.5 | 8.1 | 9.5 | 10.8 | 12.4 |
| k | 1.7 | 2.1 | 2.3 | 2.5 | 3.0 | 3.4 | 3.8 |
| t - min | 1 | 1.3 | 1.3 | 1.4 | 1.4 | 1.6 | 2.2 |
| t - max | 1.3 | 1.6 | 1.6 | 1.8 | 1.80 | 2 | 2.4 |
| Torx No. | T10 | T15 | T20 | T20 | T25 | T25 | T30 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Countersunk Head Self-Tappers Type 'AB' Pointed Slotted DIN 7972 C



| d | 2.9 | 3.5 | 4.2 | 4.8 |
|---------|------|------|------|------|
| dk | 5.5 | 6.8 | 8.1 | 9.5 |
| k | 1.7 | 2.1 | 2.5 | 3.0 |
| t - min | 0.5 | 0.6 | 0.75 | 0.85 |
| t - max | 0.75 | 0.95 | 1.15 | 1.35 |
| n | 0.8 | 1 | 1.2 | 1.2 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Raised Countersunk Head Self-Tappers Type 'AB' Pointed Pozi DIN 7983 C Z



| | | | | | | | |
|-----------------|------------|------------|------------|------------|------------|------------|------------|
| d | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
| dk | 5.5 | 6.8 | 7.5 | 8.1 | 9.5 | 10.8 | 12.4 |
| k | 1.7 | 2.1 | 2.3 | 2.5 | 3.0 | 3.4 | 3.8 |
| f | 0.9 | 1.2 | 1.3 | 1.4 | 1.5 | 1.7 | 2 |
| t - min | 1.83 | 1.88 | 2 | 2.26 | 2.69 | 2.92 | 3.4 |
| t - max | 2.08 | 2.34 | 2.46 | 2.72 | 3.15 | 3.38 | 3.86 |
| Pozi No. | 1 | 2 | 2 | 2 | 2 | 3 | 3 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Raised Countersunk Head Self-Tappers Type 'AB' Pointed Phillips DIN 7983 C H




| d | 2.2 | 2.9 | 3.5 | 3.9 | 4.2 | 4.8 | 5.5 | 6.3 |
|--------------|------|------|------|------|------|------|------|------|
| dk | 4.3 | 5.5 | 6.8 | 7.5 | 8.1 | 9.5 | 10.8 | 12.4 |
| k | 1.3 | 1.7 | 2.1 | 2.3 | 2.5 | 3.0 | 3.4 | 3.8 |
| f | 0.7 | 0.9 | 1.2 | 1.3 | 1.4 | 1.5 | 1.7 | 2 |
| t - min | 1.17 | 1.81 | 1.89 | 2.04 | 2.24 | 2.7 | 3.02 | 3.5 |
| t - max | 1.57 | 2.21 | 2.39 | 2.54 | 2.74 | 3.20 | 3.53 | 3.96 |
| Phillips No. | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Raised Countersunk Head Self-Tappers Type 'AB' Pointed Slotted DIN 7973 C

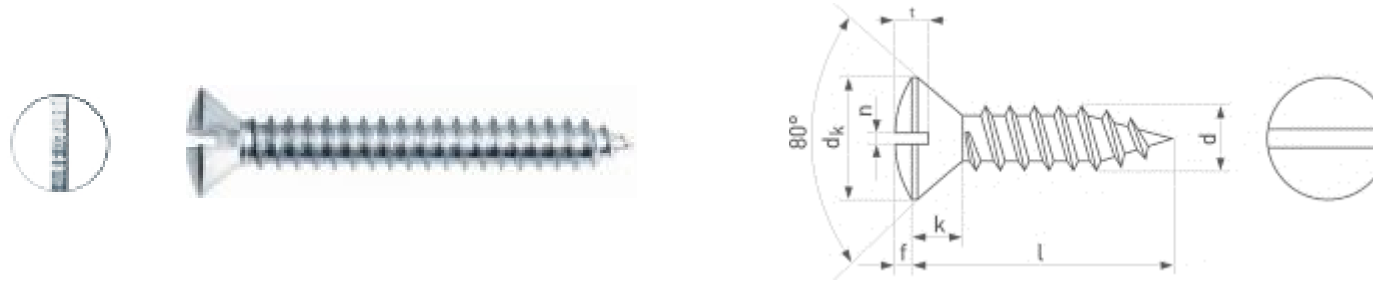

| d | 2.9 | 3.5 | 4.2 | 4.8 |
|---------|------|------|------|------|
| dk | 5.5 | 6.8 | 8.1 | 9.5 |
| k | 1.7 | 2.1 | 2.5 | 3.0 |
| f | 0.9 | 1.2 | 1.4 | 1.5 |
| t - min | 1.25 | 1.55 | 1.85 | 2.15 |
| t - max | 1.5 | 1.9 | 2.25 | 2.60 |
| n | 0.8 | 1 | 1.2 | 1.2 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Flange Head Self-Tappers

Type 'AB' Pointed Pozi BS 4174 C Z



| d | No.4 | No.6 | No.8 | No.10 |
|----------|------|------|------|-------|
| d mm | 2.9 | 3.5 | 4.2 | 4.8 |
| dk | 6.53 | 8.15 | 9.75 | 11.38 |
| k | 1.6 | 1.88 | 2.36 | 2.9 |
| T - min | 0.48 | 0.56 | 0.64 | 0.71 |
| t - min | 1.32 | 1.27 | 1.70 | 2.06 |
| t - max | 1.57 | 1.73 | 2.16 | 2.51 |
| Pozi No. | 1 | 2 | 2 | 2 |


Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Flange Head Self-Tappers

Type 'B' Pointed Pozi BS 4174 F Z

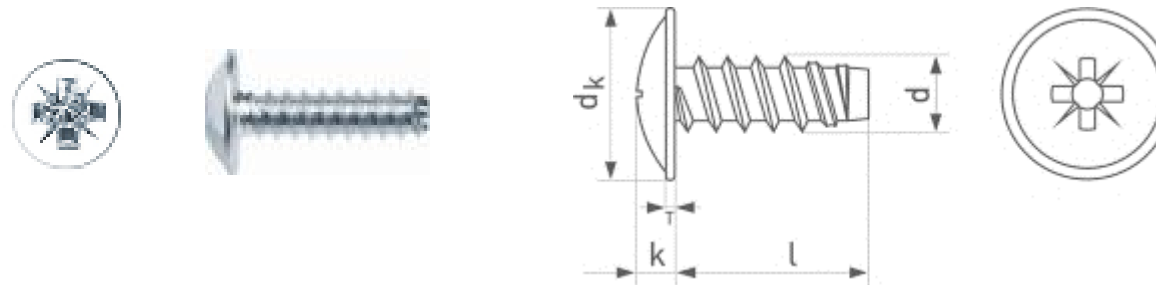


| d | No.6 | No.8 | No.10 |
|----------|------|------|-------|
| d mm | 3.5 | 4.2 | 4.8 |
| dk | 8.15 | 9.75 | 11.38 |
| k | 1.88 | 2.36 | 2.9 |
| T - min | 0.56 | 0.64 | 0.71 |
| t - min | 1.27 | 1.70 | 2.06 |
| t - max | 1.73 | 2.16 | 2.51 |
| Pozi No. | 2 | 2 | 2 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Hexagon Washer Head Self-Tappers Type 'AB' Pointed DIN 6928 C

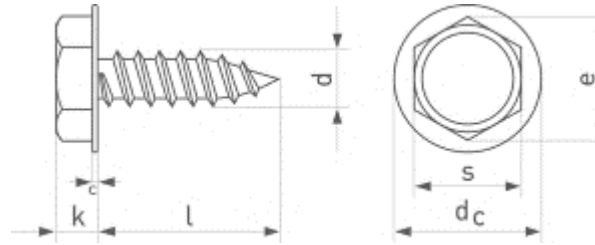

| d | No.6 | No.8 | No.10 | No.12 | No.14 |
|----------|------|------|-------|-------|-------|
| d mm | 3.5 | 4.2 | 4.8 | 4.8 | 6.3 |
| dc - max | 8.3 | 8.8 | 10.5 | 11 | 13.5 |
| k | 3.4 | 4.1 | 4.3 | 5.4 | 5.9 |
| c - min | 0.6 | 0.8 | 0.9 | 1 | 1 |
| e - min | 5.96 | 7.59 | 8.71 | 8.71 | 10.95 |
| s | 5.5 | 7 | 8 | 8 | 10 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.

Hexagon Head Self-Tappers

Type 'AB' Pointed DIN 7976 C



| d | No.6 | No.8 | No.10 | No.12 | No.14 | No.16 |
|---------|------|------|-------|-------|-------|-------|
| d mm | 3.5 | 4.2 | 4.8 | 5.5 | 6.3 | 8 |
| k | 2.3 | 2.8 | 3 | 4 | 4.8 | 5.8 |
| e - min | 5.96 | 7.59 | 8.71 | 8.71 | 10.95 | 14.26 |
| s | 5.5 | 7 | 8 | 8 | 10 | 13 |

Self-Tappers are mainly used in sheet steel products.

These screws form or tap their own thread, so saving time and providing a strong clamping action with the ability to remove and replace if required.

Available in various lengths & materials.