


Coach Bolts DIN 603/555 (Cup Square Hex)

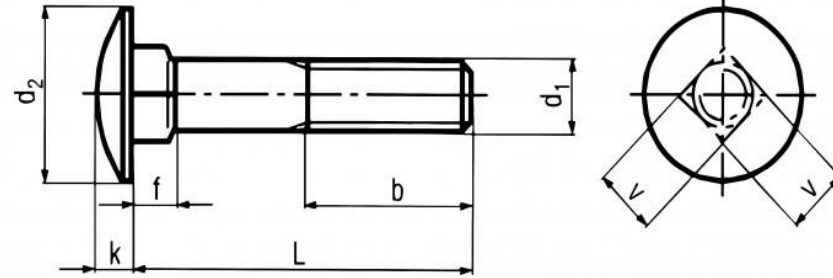

d	b(min): L - less than 125mm	b(min): L - 125mm less than 200mm	b(min): L - greater than 200mm	dk (Max)	f (Max)	k (Max)	v (Max)
M5	16	22	-	13.55	4.1	3.3	5.48
M6	18	24	-	16.55	4.6	3.88	6.48
M8	22	28	41	20.65	5.6	4.88	8.58
M10	26	32	45	24.65	6.6	5.38	10.58
M12	30	36	49	30.65	8.75	6.95	12.7
M16	38	44	57	38.8	12.9	8.95	16.7

Also known as carriage bolts. They feature a square neck under a dome head which provides a degree of security. Generally available in 4.8 grade steel but 8.8 grade is obtainable, both in a zinc plated finish. Stainless steel is also available.

Available in various length.

Tel: 01234 346242
www.challenge-europe.co.uk
sales@challenge-europe.co.uk