


# Hexagon Plain Flange Setscrews DIN 6921

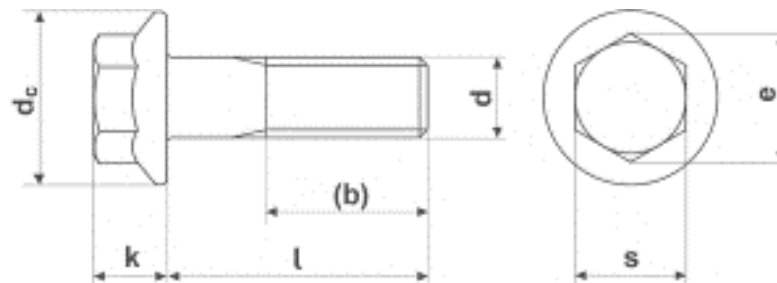

<b>d</b>	<b>M5</b>	<b>M6</b>	<b>M8</b>	<b>M10</b>	<b>M12</b>
<b>(b)</b>	16	18	22	26	30
<b>dc - max</b>	11.8	14.2	18	22.3	26.6
<b>k</b>	5.4	6.6	8.1	9.2	11.5
<b>e-min</b>	8.71	10.95	14.26	16.5	17.62
<b>s</b>	8	10	13	15	16
<b>z</b>	18-24	20-28	24-30	30-40	30-45

Incorporating a circular flange with serrations under the hexagonal head to both spread the load and provide a degree of vibration resistance. Materials: High tensile steel in a range of finishes and stainless steel.

Available in various lengths.