


Hexagon Serrated Flange Setscrews DIN 6921

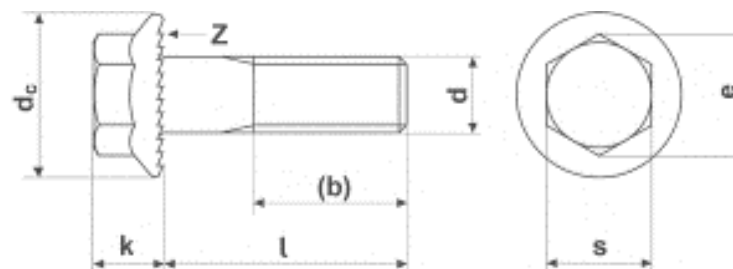

d	M5	M6	M8	M10	M12
(b)	16	18	22	26	30
dc - max	11.8	14.2	18	22.3	26.6
k	5.4	6.6	8.1	9.2	11.5
e-min	8.71	10.95	14.26	16.5	17.62
s	8	10	13	15	16
z	18-24	20-28	24-30	30-40	30-45

Incorporating a circular flange with serrations under the hexagonal head to both spread the load and provide a degree of vibration resistance. Materials: High tensile steel in a range of finishes and stainless steel.

Available in various lengths.