


Crinkle Washers

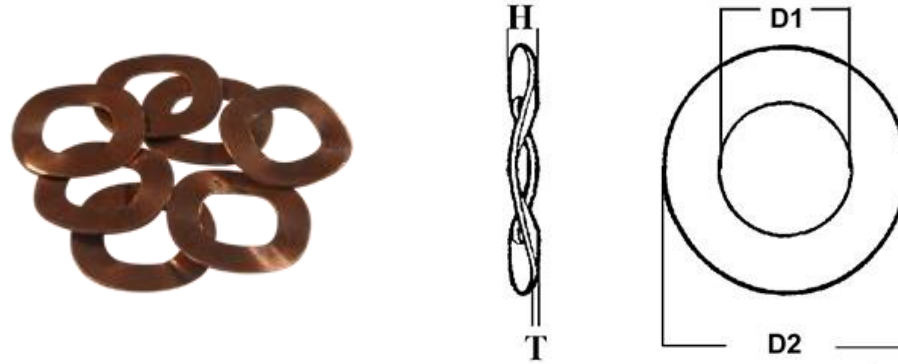

Nominal Size and Thread Diameter	Inside Diameter (D1)		Outside Diameter (D2)		Height (H)		Thickness (T) Nominal mm
	Min mm	Max mm	Min mm	Max mm	Min mm	Max mm	
M1.6	1.70	1.80	3.52	3.70	0.36	0.51	0.16
M2	2.20	2.30	4.42	4.60	0.38	0.53	0.16
M2.5	2.70	2.80	5.62	5.80	0.38	0.53	0.16
M3	3.20	3.32	6.18	6.40	0.46	0.61	0.16
M3.5	3.70	3.82	6.68	6.90	0.63	0.79	0.20
M4	4.30	4.42	7.88	8.10	0.69	0.84	0.28
M5	5.30	5.42	8.98	9.20	0.74	0.89	0.30
M6	6.40	6.55	11.23	11.50	0.99	1.14	0.40
M8	8.40	8.55	14.73	15.00	1.25	1.40	0.40
M10	10.50	10.68	19.27	19.60	1.55	1.70	0.55
M12	13.00	13.18	21.67	22.00	1.65	1.90	0.55
M16	17.00	17.18	27.47	27.80	2.16	2.41	0.70
M20	21.00	21.21	34.31	34.70	2.16	2.66	0.70

Also known as wavy washers, they provide a degree of anti-vibration resistance and load spreading. Generally in stainless steel or Beryllium Copper in both metric and imperial sizes.