KORREX Insulating Bushes


When two metals are in contact and moisture collects between their surfaces, electrolytic corrosion occurs owing to ion-exchange, which attacks the material.

This can be avoided by the use of KORREX insulation bushes of super polyamide, which are recommended for the following combinations of metals:-

Brass - Iron

Aluminium - Steel

Iron - Copper Eloxal - Iron Iron - Lead Zinc - Tin



When used in conjunction with KORREX Caps, they are also a protection against corrosion.

KORREX Insulation Bushes can be used in conjunction with:

- KORREX Caps
- DUBO Retaining Rings









KORREX Insulating Bushes For screwed assemblies with metric threads



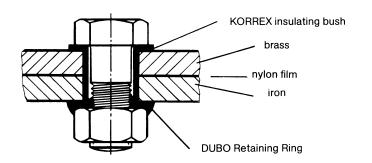

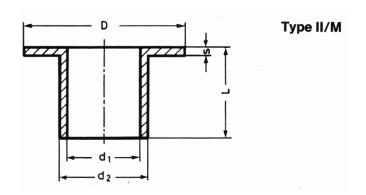

Part No.	for thread size	L	d₁	d ₂	D	S	Maximum length=L
875	M 4	5	4.3	5.8	9.5	1	20
876	M 5	5	5.3	6.8	12	1	20
877	M 6	5	6.5	8	13	1	20
878	M 8	5	8-2	10-4	18	1	22
879	M 10	5	10-2	12-5	21	1	25
880	M 12	5	12.3	15	24	1	25
882	M 16	5	16-3	19-3	30	2	25
884	M 20	5	20.3	23.3	36	2	25

Temperature Range:- -60°C to +120°C

Material Rings:- Nylon 6



KORREX Rosettes

KORREX rosettes can be used on all bolts and screws with countersunk head.

KORREX rosettes provide insulation and excellent surface-protection.

By applying these rosettes damage to the surface is avoided, damage which not only gives a bad appearance but which may also have unfavourable effects.



KORREX rosettes are indispensable for:-

- · Ship and yacht building,
- · Enamelled parts of:-
 - washing machines
 - electrical and gas ranges,
 - dish-washers, etc..
- · Wooden furniture,
- Upholstered furniture,
- · Painted wood and metals,
- · Plastics, both for industrial and domestic use.


Standard execution:- White.







KORREX Rosettes







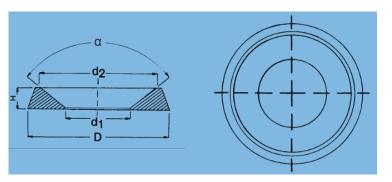

N. Alle Alle	-14	-10			
Metric	d1	d2	D	H	α
M 3	3,30	6,60	8,10	2,20	90°
M 4	4,10	6,60	7,60	2,00	90°
M 5	5,20	9,50	11,30	2,40	90°
M 6	6,30	11,60	13,40	2,60	90°
M 8	8,20	15,00	18,00	4,00	90°

Temperature range:- -60°C to +120°C

Material rings:- Nylon 6

Standard Colour: - White

